

- GENERAL SHEET NOTES:**
- A. REFER TO E000 FOR ELECTRICAL SYMBOLS, ABBREVIATIONS, INSTALLATION NOTES, AND RENOVATION NOTES.
 - B. PROVIDE A NEW DEDICATED GROUNDING CONDUCTOR BETWEEN THE CIRCUIT HOMERUN AND THE PANELBOARD, FOR EVERY CIRCUIT IN THE ROOM.
 - C. EXTEND EXISTING AREA LIGHTING CIRCUIT TO NEW FIXTURES WITH 2#10 & 1#10 GND IN 3/4" C. VIA NEW LIGHTING CONTROLS.
 - D. NEW LIGHT FIXTURES AND OCCUPANCY SENSORS SHALL BE INSTALLED 9' ABOVE FINISHED FLOOR.
 - E. PROVIDE 3/4" CONDUIT FOR LIGHTING CONTROL CABLING.

DELV
DESIGN




LILY HALL TEACHING
LAB 1-129
RENOVATION

ARCHITECT

DELV Design
212 W. 10th St. STE F125
Indianapolis, IN 46202
(317) 296-7400

MEP

IMEG
8900 Keystone Crossing #210
Indianapolis, IN 46240
(317) 848-5045

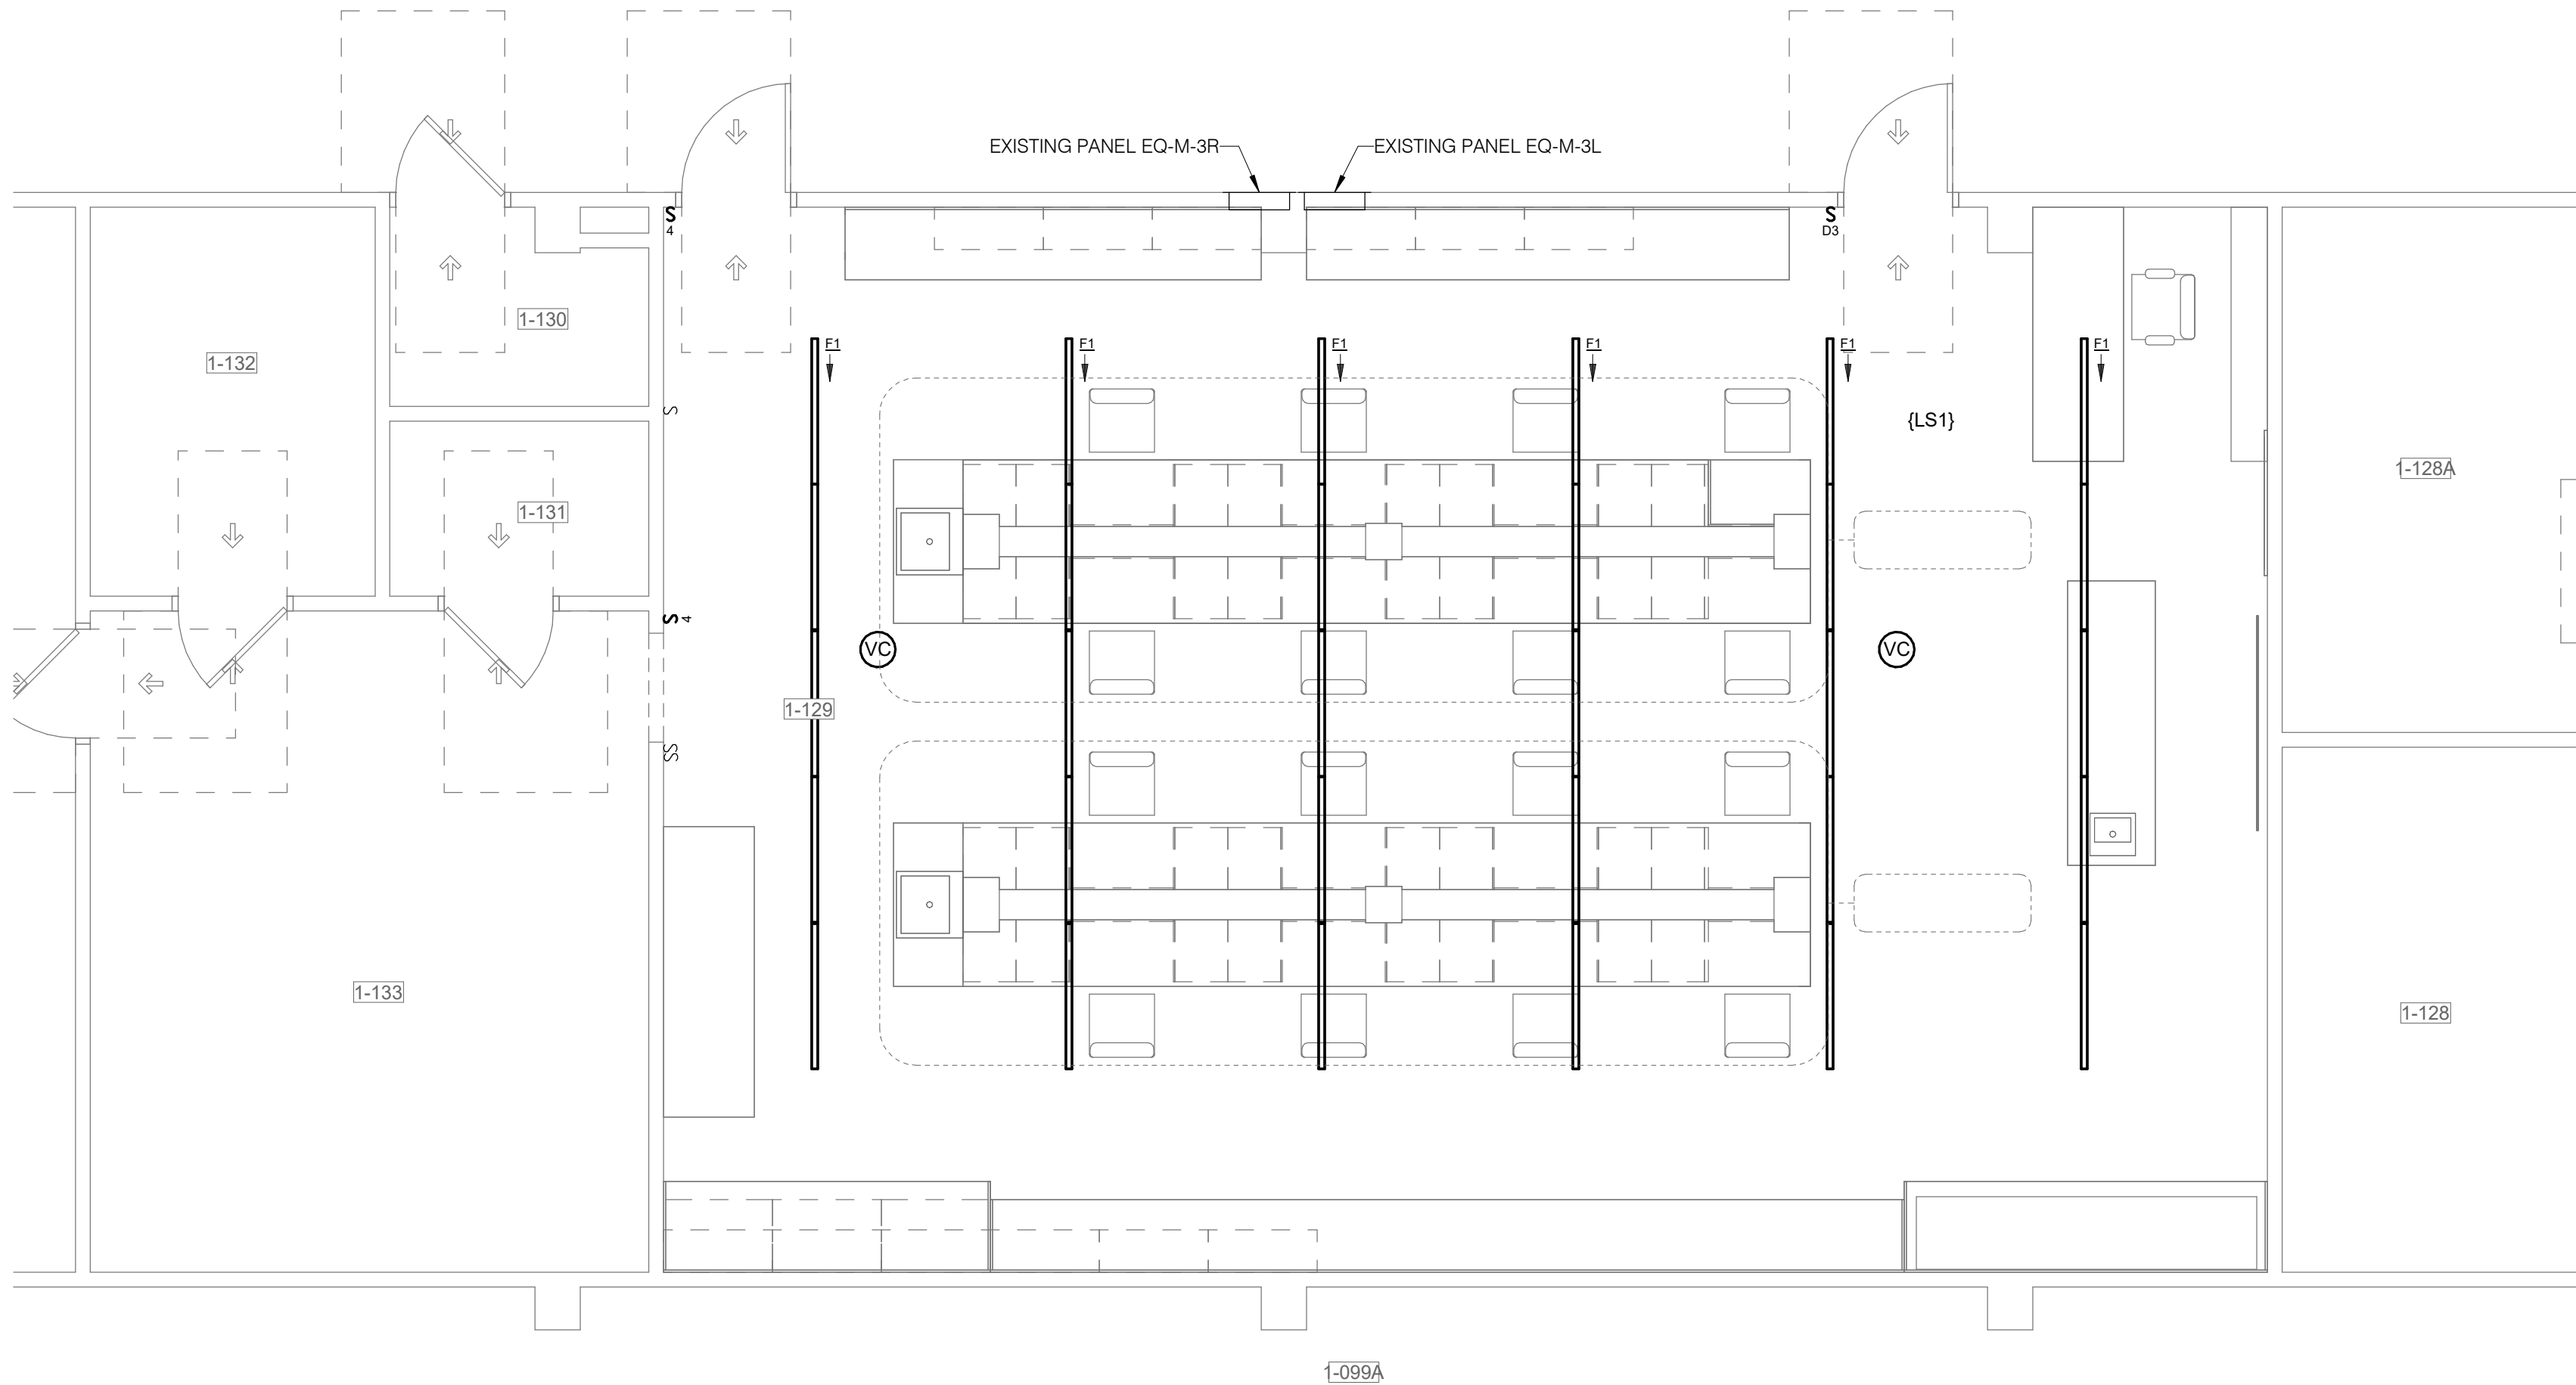

1

FIRST FLOOR LIGHTING PLAN

1/4" = 1'-0"

100% CONSTRUCTION
DOCUMENTS



10.03.24

Christopher J. Edwards

No.	Description	Date

PROJECT #: 24005124.00
ISSUE DATE: 10.03.2024
DRW: RT | CHK: CJE

FIRST FLOOR
LIGHTING PLAN

E211